


contour + volume
by grazing light
from

ITALI LINE



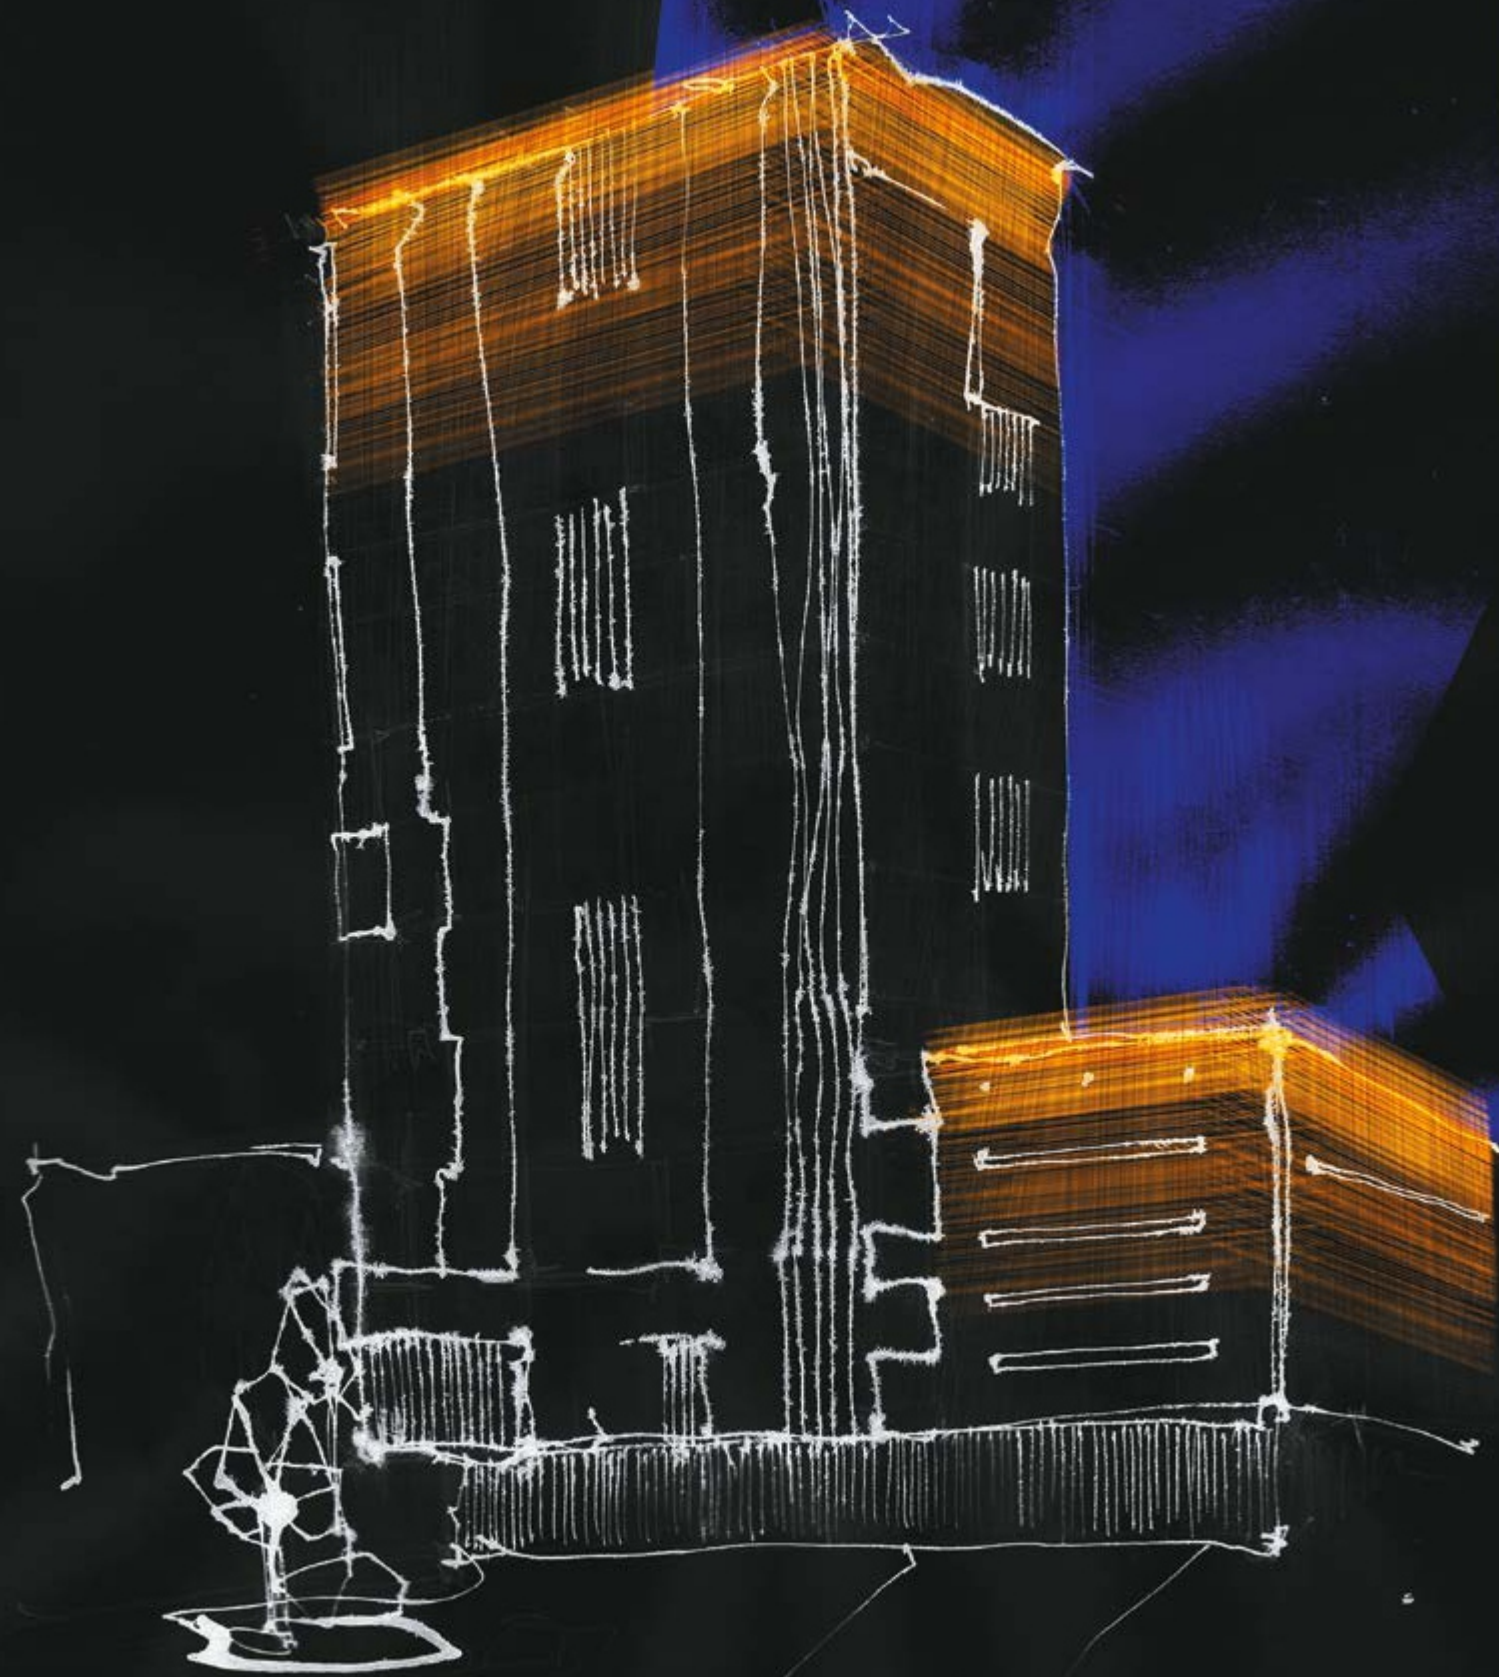

IntiLINE series

The lighting fixture that is basic and essential in majority of projects for creating various floodlighting effects: from soft and delicate to highly intense and powerful.

CE ENEC tropic IP65    



Original Nichia and Cree LEDs

Cree XPE2 series color LEDs, Nichia x219 white LEDs.
Optimized for architectural application with primary optics and feature high light quality.
Additional ranging ensures hue repeatability.



Exact positioning of secondary optics

Secondary optics by the leading manufacturer Ledil ensure precise expansion angles, light brightness and high operation efficiency.
Ultra-precise positioning in relation to LEDs ensures maximum uniformity in light distribution.




Specialized cable products

Thermal-resistant, UV-stabilized cable of the required ambient class.
Corrosion-resistant cable inputs with high-quality sealers and a wide temperature range.

Vent valve

Protects the luminaire from condensate accumulation.

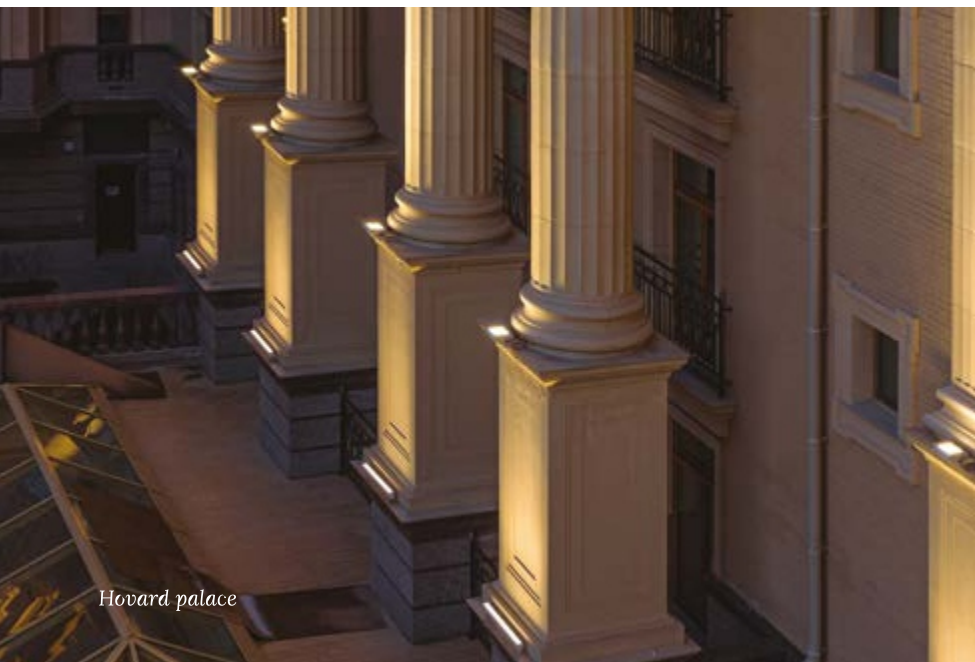

Howard palace



Ural Military Glory Museum



Khoroshevskaya Gymnasium



Water academy



Moscow Central Circle




River Boat Station


Specifications

- Light source:**
Nichia (Japan), Cree (USA) LEDs
- Light color:**
white (3000K, 4000K, 5000K), RGB, RGBW
- Optics:**
10°, 30°, 10x50°, 60°, 80°, 120° (without lenses)
- Luminous flux:**
300-5100 lm
- CRI:**
≥80
- Wattage:**
6-81 W
- Voltage:**
90-264 V AC
- Control:**
DMX-512 for RGB/RGBW; not available for white
- Protection class:**
IP65
- Operation temperature:**
-40°C ... +45°C for standard edition,
-40°C ... +55°C for tropic edition
- Lifespan:**
not less than 50 000 hours
- Lengths:**
white: 362, 682, 1002, 1334, 1654 mm;
RGB/RGBW: 356, 672, 987, 1302 mm
- Front dimensions:**
82x82 mm
- Weight:**
2-5,4 kg
- Materials:**
device housing: extruded aluminum section covered with powder paint; end caps: cast aluminum; protective glass: shock-resistant polycarbonate; mounting arms: zink-plated steel covered with powder paint to fit the luminaire color; mounts: stainless steel.
- Customization:**
customized LEDs color combinations; control/power cables of any length; housing and accessories painting in any RAL color; production of customized accessories; IP68 connectors; power and control in-line connection; PWM control.
- Mounting:**
on an adjustable bracket.


Optics

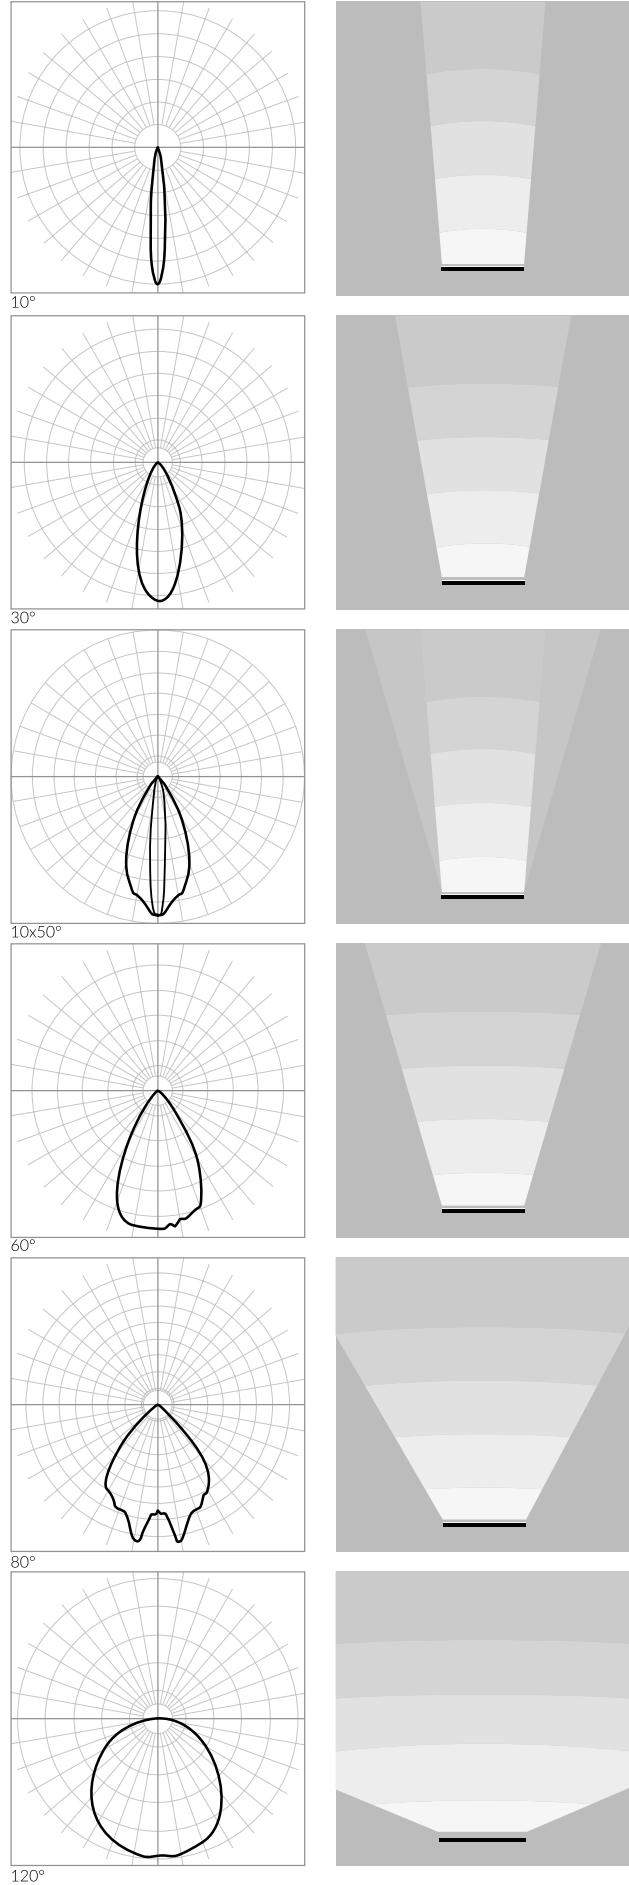


Overall dimensions

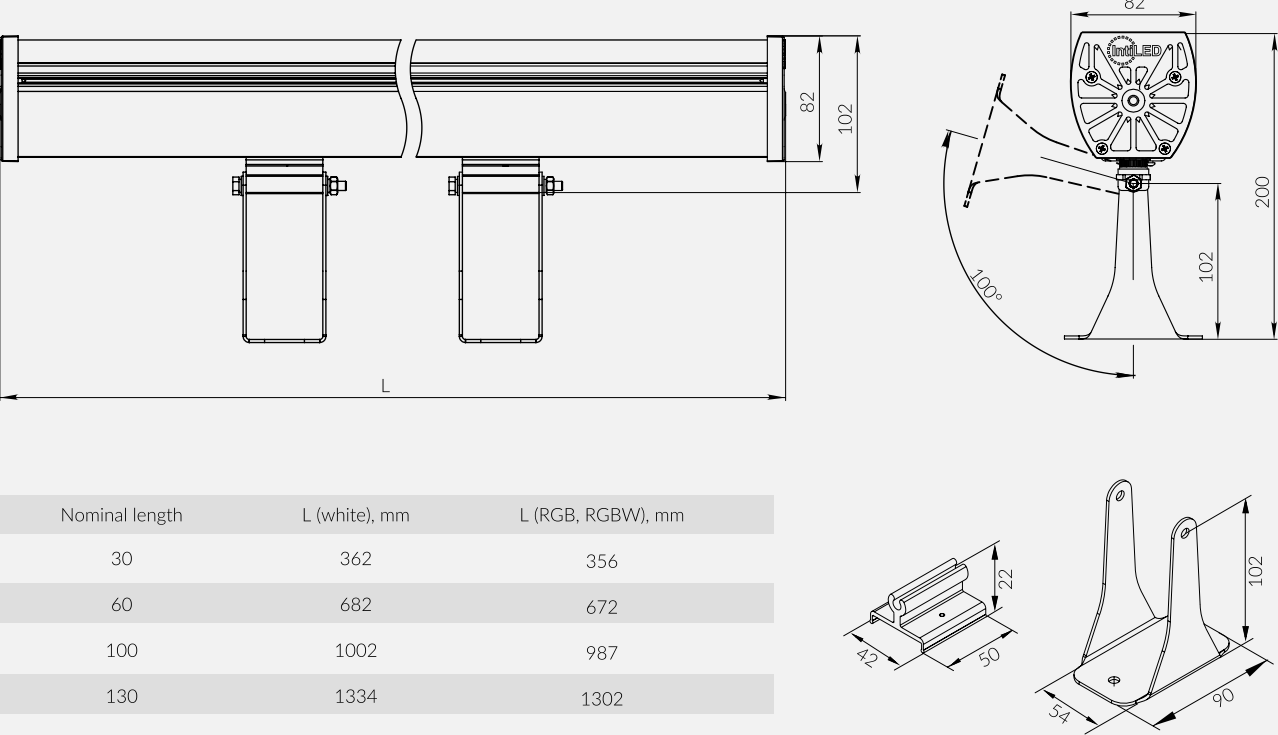

IntiLINE white color luminaire connection diagram

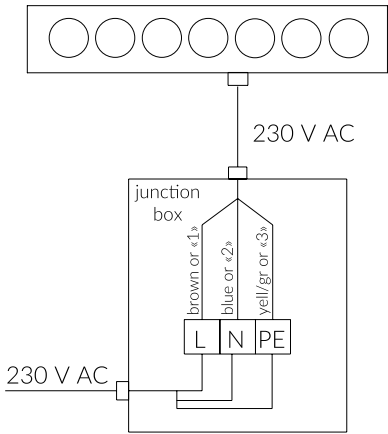

IntiLINE dynamic color luminaire connection diagram

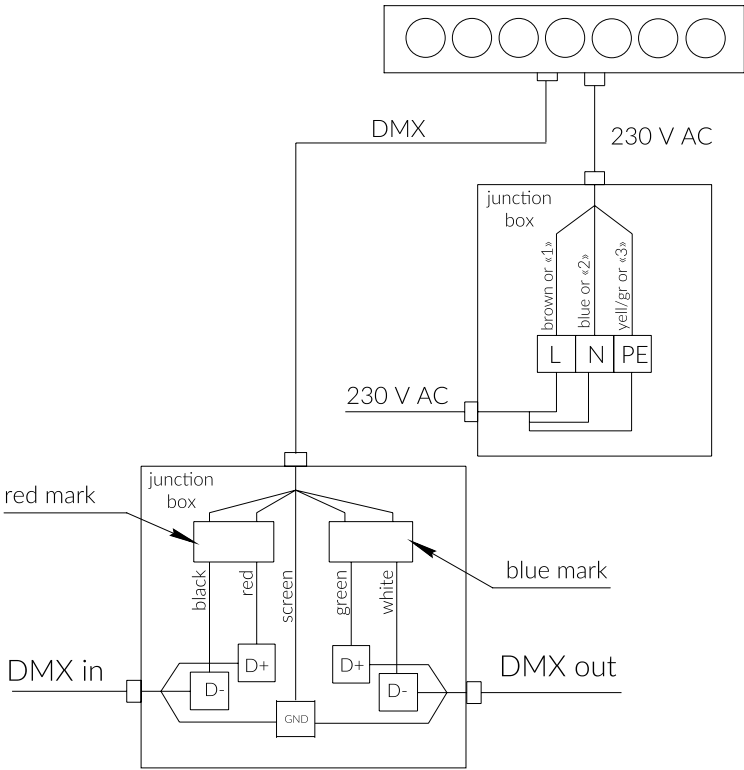



Russian bridge

Accessories

Control gear:

- LED IPCe controller
- Ltech EX8S RGBW controller
- Ltech WiFi-101-DMX4 controller
- Converter USB-ILCS
- Converter ILCS-DMX
- Splitter DMX(B1)
- Splitter ILCS(U4)

Additional equipment:

- Blind

Model range

	Wattage*,	Luminous	Optics,	Color,	Code
	W	flux, lm	degree	K	
	362x82x82 mm, 2 kg white				
	6	470	10	3000	ILF5-1W30-10H-30
	6	490	10	4000	ILF5-1W30-10H-30
	6	490	10	5000	ILF5-1W30-10H-30
	6	460	30	3000	ILF5-1W30-30H-30
	6	480	30	4000	ILF5-1W40-30H-30
	6	480	30	5000	ILF5-1W50-30H-30
	6	460	60	3000	ILF5-1W30-60H-30
	6	480	60	4000	ILF5-1W40-60H-30
	6	480	60	5000	ILF5-1W50-60H-30
	6	480	80	3000	ILF5-1W30-80H-30
	6	510	80	4000	ILF5-1W40-80H-30
	6	510	80	5000	ILF5-1W50-80H-30
	6	390	120	3000	ILF5-1W30-120H-30
	6	410	120	4000	ILF5-1W40-120H-30
	6	410	120	5000	ILF5-1W50-120H-30
	6	440	10x50	3000	ILF5-1W30-10x50H-30
	6	460	10x50	4000	ILF5-1W40-10x50H-30
	6	460	10x50	5000	ILF5-1W50-10x50H-30
	8	660	10	3000	ILF7-1W30-10H-30
	8	690	10	4000	ILF7-1W40-10H-30
	8	690	10	5000	ILF7-1W50-10H-30
	8	640	30	3000	ILF7-1W30-30H-30
	8	670	30	4000	ILF7-1W40-30H-30
	8	670	30	5000	ILF7-1W50-30H-30
	8	640	60	3000	ILF7-1W30-60H-30
	8	670	60	4000	ILF7-1W40-60H-30
	8	670	60	5000	ILF7-1W50-60H-30
	8	680	80	3000	ILF7-1W30-80H-30
	8	710	80	4000	ILF7-1W40-80H-30
	8	710	80	5000	ILF7-1W50-80H-30
	8	550	120	3000	ILF7-1W30-120H-30
	8	580	120	4000	ILF7-1W40-120H-30
	8	580	120	5000	ILF7-1W50-120H-30
	8	610	10x50	3000	ILF7-1W30-10x50H-30
	8	640	10x50	4000	ILF7-1W40-10x50H-30
	8	640	10x50	5000	ILF7-1W50-10x50H-30
	12	940	10	3000	ILF10-1W30-10H-30
	12	990	10	4000	ILF10-1W40-10H-30
	12	980	10	5000	ILF10-1W50-10H-30
	12	920	30	3000	ILF10-1W30-30H-30
	12	960	30	4000	ILF10-1W40-30H-30
	12	960	30	5000	ILF10-1W50-30H-30
	12	920	60	3000	ILF10-1W30-60H-30
	12	960	60	4000	ILF10-1W40-60H-30
	12	960	60	5000	ILF10-1W50-60H-30
	12	970	80	3000	ILF10-1W30-80H-30
	12	1000	80	4000	ILF10-1W40-80H-30
	12	1000	80	5000	ILF10-1W50-80H-30
	12	790	120	3000	ILF10-1W30-120H-30
	12	830	120	4000	ILF10-1W40-120H-30
	12	820	120	5000	ILF10-1W50-120H-30
	12	870	10x50	3000	ILF10-1W30-10x50H-30
	12	920	10x50	4000	ILF10-1W40-10x50H-30
	12	910	10x50	5000	ILF10-1W50-10x50H-30



Wattage*, W	Luminous flux, lm	Optics, degree	Color, K	Code
682x82x82 mm, 2,8 kg white				
12	940	10	3000	ILF10-1W30-10H-60
12	990	10	4000	ILF10-1W40-10H-60
12	980	10	5000	ILF10-1W50-10H-60
12	920	30	3000	ILF10-1W30-30H-60
12	960	30	4000	ILF10-1W40-30H-60
12	960	30	5000	ILF10-1W50-30H-60
12	920	60	3000	ILF10-1W30-60H-60
12	960	60	4000	ILF10-1W40-60H-60
12	960	60	5000	ILF10-1W50-60H-60
12	970	80	3000	ILF10-1W30-80H-60
12	1000	80	4000	ILF10-1W40-80H-60
12	1000	80	5000	ILF10-1W50-80H-60
12	790	120	3000	ILF10-1W30-120H-60
12	830	120	4000	ILF10-1W40-120H-60
12	820	120	5000	ILF10-1W50-120H-60
12	870	10x50	3000	ILF10-1W30-10x50H-60
12	920	10x50	4000	ILF10-1W30-10x50H-60
12	910	10x50	5000	ILF10-1W30-10x50H-60
17	1300	10	3000	ILF14-1W30-10H-60
17	1400	10	4000	ILF14-1W40-10H-60
17	1350	10	5000	ILF14-1W50-10H-60
17	1300	30	3000	ILF14-1W30-30H-60
17	1350	30	4000	ILF14-1W40-30H-60
17	1350	30	5000	ILF14-1W50-30H-60
17	1300	60	3000	ILF14-1W30-60H-60
17	1350	60	4000	ILF14-1W40-60H-60
17	1350	60	5000	ILF14-1W50-60H-60
17	1350	80	3000	ILF14-1W30-80H-60
17	1450	80	4000	ILF14-1W40-80H-60
17	1400	80	5000	ILF14-1W50-80H-60
17	1100	120	3000	ILF14-1W30-120H-60
17	1150	120	4000	ILF14-1W30-120H-60
17	1150	120	5000	ILF14-1W30-120H-60
17	1200	10x50	3000	ILF14-1W30-10x50H-60
17	1300	10x50	4000	ILF14-1W40-10x50H-60
17	1300	10x50	5000	ILF14-1W50-10x50H-60
24	1850	10	3000	ILF20-1W30-10H-60
24	1950	10	4000	ILF20-1W40-10H-60
24	1950	10	5000	ILF20-1W50-10H-60
24	1850	30	3000	ILF20-1W30-30H-60
24	1950	30	4000	ILF20-1W40-30H-60
24	1900	30	5000	ILF20-1W50-30H-60
24	1850	60	3000	ILF20-1W30-60H-60
24	1950	60	4000	ILF20-1W40-60H-60
24	1900	60	5000	ILF20-1W50-60H-60
24	1950	80	3000	ILF20-1W30-80H-60
24	2050	80	4000	ILF20-1W40-80H-60
24	2000	80	5000	ILF20-1W50-80H-60
24	1600	120	3000	ILF20-1W30-120H-60
24	1650	120	4000	ILF20-1W40-120H-60
24	1650	120	5000	ILF20-1W50-120H-60
24	1750	10x50	3000	ILF20-1W30-10x50H-60
24	1850	10x50	4000	ILF20-1W40-10x50H-60
24	1800	10x50	5000	ILF20-1W50-10x50H-60
1002x82x82 mm, 3,8 kg white				
18	1400	10	3000	ILF15-1W30-10H-100
18	1500	10	4000	ILF15-1W40-10H-100
18	1450	10	5000	ILF15-1W50-10H-100
18	1350	30	3000	ILF15-1W30-30H-100
18	1450	30	4000	ILF15-1W30-30H-100
18	1450	30	5000	ILF15-1W30-30H-100
18	1450	60	3000	ILF15-1W40-60H-100
18	1450	60	4000	ILF15-1W50-60H-100
18	1450	80	3000	ILF15-1W30-80H-100
18	1550	80	4000	ILF15-1W40-80H-100
18	1500	80	5000	ILF15-1W50-80H-100
18	1200	120	3000	ILF15-1W30-120H-100
18	1250	120	4000	ILF15-1W40-120H-100
18	1250	120	5000	ILF15-1W50-120H-100
18	1300	10x50	3000	ILF15-1W30-10x50H-100
18	1400	10x50	4000	ILF15-1W40-10x50H-100
18	1350	10x50	5000	ILF15-1W50-10x50H-100
25	1950	10	3000	ILF21-1W30-10H-100
25	2050	10	4000	ILF21-1W40-10H-100
25	2050	10	5000	ILF21-1W50-10H-100
25	1900	30	3000	ILF21-1W30-30H-100
25	2000	30	4000	ILF21-1W40-30H-100
25	2000	30	5000	ILF21-1W50-30H-100
25	1900	60	3000	ILF21-1W30-60H-100
25	2000	60	4000	ILF21-1W40-60H-100
25	2000	60	5000	ILF21-1W50-60H-100
25	2050	80	3000	ILF21-1W30-80H-100
25	2150	80	4000	ILF21-1W40-80H-100
25	2150	80	5000	ILF21-1W50-80H-100
25	1650	120	3000	ILF21-1W30-120H-100
25	1750	120	4000	ILF21-1W40-120H-100
25	1750	120	5000	ILF21-1W50-120H-100
25	1850	10x50	3000	ILF21-1W30-10x50H-100
25	1950	10x50	4000	ILF21-1W40-10x50H-100
25	1900	10x50	5000	ILF21-1W50-10x50H-100
36	2800	10	3000	ILF30-1W30-10H-100
36	2950	10	4000	ILF30-1W40-10H-100
36	2950	10	5000	ILF30-1W50-10H-100
36	2750	30	3000	ILF30-1W30-30H-100
36	2900	30	4000	ILF30-1W40-30H-100

1002x82x82 mm, 3,8 kg white				
36	2850	30	5000	ILF30-1W50-30H-100
36	2750	60	3000	ILF30-1W30-60H-100
36	2900	60	4000	ILF30-1W40-60H-100
36	2850	60	5000	ILF30-1W50-60H-100
36	2900	80	3000	ILF30-1W30-80H-100
36	3050	80	4000	ILF30-1W40-80H-100
36	3050	80	5000	ILF30-1W50-80H-100
36	2350	120	3000	ILF30-1W30-120H-100
36	2500	120	4000	ILF30-1W40-120H-100
36	2450	120	5000	ILF30-1W50-120H-100
36	2600	10x50	3000	ILF30-1W30-10x50H-100
36	2750	10x50	4000	ILF30-1W40-10x50H-100
36	2750	10x50	5000	ILF30-1W50-10x50H-100

1334x82x82 mm, 4,6 kg white				
24	1850	10	3000	ILF20-1W30-10H-130
24	1950	10	4000	ILF20-1W40-10H-130
24	1950	10	5000	ILF20-1W50-10H-130
24	1850	30	3000	ILF20-1W30-30H-130
24	1950	30	4000	ILF20-1W40-30H-130
24	1900	30	5000	ILF20-1W50-30H-130
24	1850	60	3000	ILF20-1W30-60H-130
24	1950	60	4000	ILF20-1W40-60H-130
24	1900	60	5000	ILF20-1W50-60H-130
24	1950	80	3000	ILF20-1W30-80H-130
24	2050	80	4000	ILF20-1W40-80H-130
24	2000	80	5000	ILF20-1W50-80H-130
24	1600	120	3000	ILF20-1W30-120H-130
24	1650	120	4000	ILF20-1W40-120H-130
24	1650	120	5000	ILF20-1W50-120H-130
24	1750	10x50	3000	ILF20-1W30-10x50H-130
24	1850	10x50	4000	ILF20-1W40-10x50H-130
24	1800	10x50	5000	ILF20-1W50-10x50H-130
33	2600	10	3000	ILF28-1W30-10H-130
33	2750	10	4000	ILF28-1W40-10H-130
33	2750	10	5000	ILF28-1W50-10H-130
33	2550	30	3000	ILF28-1W30-30H-130
33	2700	30	4000	ILF28-1W40-30H-130
33	2700	30	5000	ILF28-1W50-30H-130
33	2550	60	3000	ILF28-1W30-60H-130
33	2700	60	4000	ILF28-1W40-60H-130
33	2700	60	5000	ILF28-1W50-60H-130
33	2700	80	3000	ILF28-1W30-80H-130
33	2850	80	4000	ILF28-1W40-80H-130
33	2850	80	5000	ILF28-1W50-80H-130
33	2200	120	3000	ILF28-1W30-120H-130
33	2300	120	4000	ILF28-1W40-120H-130
33	2300	120	5000	ILF28-1W50-120H-130
33	2450	10x50	3000	ILF28-1W30-10x50H-130
33	2550	10x50	4000	ILF28-1W40-10x50H-130
33	2550	10x50	5000	ILF28-1W50-10x50H-130
48	3750	10	3000	ILF40-1W30-10H-130
48	3950	10	4000	ILF40-1W40-10H-130
48	3900	10	5000	ILF40-1W50-10H-130
48	3650	30	3000	ILF40-1W30-30H-130
48	3850	30	4000	ILF40-1W40-30H-130
48	3850	30	5000	ILF40-1W50-30H-130
48	3650	60	3000	ILF40-1W30-60H-130
48	3850	60	4000	ILF40-1W40-60H-130
48	3850	60	5000	ILF40-1W50-60H-130
48	3850	80	3000	ILF40-1W30-80H-130
48	4100	80	4000	ILF40-1W40-80H-130
48	4050	80	5000	ILF40-1W50-80H-130
48	3150	120	3000	ILF40-1W30-120H-130
48	3300	120	4000	ILF40-1W40-120H-130
48	3300	120	5000	ILF40-1W50-120H-130
48	3500	10x50	3000	ILF40-1W30-10x50H-130
48	3650	10x50	4000	ILF40-1W40-10x50H-130
48	3650	10x50	5000	ILF40-1W50-10x50H-130

1654x82x82 mm, 5,4 kg white				
30	2350	10	3000	ILF25-1W30-10H-160
30	2450	10	4000	ILF25-1W40-10H-160
30	2450	10	5000	ILF25-1W50-10H-160
30	2300	30	3000	ILF25-1W30-30H-160
30	2400	30	4000	ILF25-1W40-30H-160
30	2400	30	5000	ILF25-1W50-30H-160
30	2300	60	3000	ILF25-1W30-60H-160
30	2400	60	4000	ILF25-1W40-60H-160
30	2400	60	5000	ILF25-1W50-60H-160
30	2400	80	3000	ILF25-1W30-80H-160
30	2550	80	4000	ILF25-1W40-80H-160
30	2550	80	5000	ILF25-1W50-80H-160
30	1950	120	3000	ILF25-1W30-120H-160
30	2050	120	4000	ILF25-1W40-120H-160
30	2050	120	5000	ILF25-1W50-120H-160
30	2200	10x50	3000	ILF25-1W30-10x50H-160
30	2300	10x50	4000	ILF25-1W40-10x50H-160
30	2300	10x50	5000	ILF25-1W50-10x50H-160
42	3300	10	3000	ILF35-1W30-10H-160
42	3450	10	4000	ILF35-1W40-10H-160
42	3450	10	5000	ILF35-1W50-10H-160
42	3200	30	3000	ILF35-1W30-30H-160
42	3350	30	4000	ILF35-1W40-30H-160
42	3350	30	5000	ILF35-1W50-30H-160
42	3200	60	3000	ILF35-1W30-60H-160



Wattage*, W	Luminous flux, lm	Optics, degree	Color, K	Code
672x82x82 mm, 2,8 kg RGBW – DMX				
41	1610	10	RGBW 3000	ILF24-1RGBW30-10CH-60
41	1660	10	RGBW 4000	ILF24-1RGBW40-10CH-60
41	1650	10	RGBW 5000	ILF24-1RGBW50-10CH-60
41	1590	30	RGBW 3000	ILF24-1RGBW30-30CH-60
41	1640	30	RGBW 4000	ILF24-1RGBW40-30CH-60
41	1630	30	RGBW 5000	ILF24-1RGBW50-30CH-60
41	1590	60	RGBW 3000	ILF24-1RGBW30-60CH-60
41	1640	60	RGBW 4000	ILF24-1RGBW40-60CH-60
41	1630	60	RGBW 5000	ILF24-1RGBW50-60CH-60
41	1640	80	RGBW 3000	ILF24-1RGBW30-80CH-60
41	1690	80	RGBW 4000	ILF24-1RGBW40-80CH-60
41	1680	80	RGBW 5000	ILF24-1RGBW50-80CH-60
41	1320	120	RGBW 3000	ILF24-1RGBW30-120CH-60
41	1360	120	RGBW 4000	ILF24-1RGBW40-120CH-60
41	1360	120	RGBW 5000	ILF24-1RGBW50-120CH-60
41	1500	10x50	RGBW 3000	ILF24-1RGBW30-10x50CH-60
41	1540	10x50	RGBW 4000	ILF24-1RGBW40-10x50CH-60
41	1540	10x50	RGBW 5000	ILF24-1RGBW50-10x50CH-60
987x82x82 mm, 3,8 kg RGBW – DMX				
61	2400	10	RGBW 3000	ILF36-1RGBW30-10CH-100
61	2500	10	RGBW 4000	ILF36-1RGBW40-10CH-100
61	2500	10	RGBW 5000	ILF36-1RGBW50-10CH-100
61	2400	30	RGBW 3000	ILF36-1RGBW30-30CH-100
61	2450	30	RGBW 4000	ILF36-1RGBW40-30CH-100
61	2450	30	RGBW 5000	ILF36-1RGBW50-30CH-100
61	2400	60	RGBW 3000	ILF36-1RGBW30-60CH-100
61	2450	60	RGBW 4000	ILF36-1RGBW40-60CH-100
61	2450	60	RGBW 5000	ILF36-1RGBW50-60CH-100
61	2450	80	RGBW 3000	ILF36-1RGBW30-80CH-100
61	2550	80	RGBW 4000	ILF36-1RGBW40-80CH-100
61	2550	80	RGBW 5000	ILF36-1RGBW50-80CH-100
61	1960	120	RGBW 3000	ILF36-1RGBW30-120CH-100
61	2060	120	RGBW 4000	ILF36-1RGBW40-120CH-100
61	2010	120	RGBW 5000	ILF36-1RGBW50-120CH-100
61	2250	10x50	RGBW 3000	ILF36-1RGBW30-10x50CH-100
61	2300	10x50	RGBW 4000	ILF36-1RGBW40-10x50CH-100
61	2300	10x50	RGBW 5000	ILF36-1RGBW50-10x50CH-100
1302x82x82 mm, 4,6 kg RGBW – DMX				
81	3250	10	RGBW 3000	ILF48-1RGBW30-10CH-130
81	3350	10	RGBW 4000	ILF48-1RGBW40-10CH-130
81	3300	10	RGBW 5000	ILF48-1RGBW50-10CH-130
81	3150	30	RGBW 3000	ILF48-1RGBW30-30CH-130
81	3250	30	RGBW 4000	ILF48-1RGBW40-30CH-130
81	3250	30	RGBW 5000	ILF48-1RGBW50-30CH-130
81	3150	60	RGBW 3000	ILF48-1RGBW30-60CH-130
81	3250	60	RGBW 4000	ILF48-1RGBW40-60CH-130
81	3250	60	RGBW 5000	ILF48-1RGBW50-60CH-130
81	3250	80	RGBW 3000	ILF48-1RGBW30-80CH-130
81	3350	80	RGBW 4000	ILF48-1RGBW40-80CH-130
81	3350	80	RGBW 5000	ILF48-1RGBW50-80CH-130
81	2650	120	RGBW 3000	ILF48-1RGBW30-120CH-130
81	2700	120	RGBW 4000	ILF48-1RGBW40-120CH-130
81	2700	120	RGBW 5000	ILF48-1RGBW50-120CH-130
81	3050	10x50	RGBW 3000	ILF48-1RGBW30-10x50CH-130
81	3350	10x50	RGBW 4000	ILF48-1RGBW40-10x50CH-130
81	3350	10x50	RGBW 5000	ILF48-1RGBW50-10x50CH-130

* the maximum luminaire power consumption with the simultaneous 3 or 4 channels operation
** luminous flux with the simultaneous 3 or 4 channels operation





1654x82x82 mm, 5,4 kg white				
42	3350	60	4000	ILF35-1W40-60H-160
42	3350	60	5000	ILF35-1W50-60H-160
42	3400	80	3000	ILF35-1W30-80H-160
42	3550	80	4000	ILF35-1W40-80H-160
42	3550	80	5000	ILF35-1W50-80H-160
42	2750	120	3000	ILF35-1W30-120H-160
42	2900	120	4000	ILF35-1W40-120H-160
42	2900	120	5000	ILF35-1W50-120H-160
42	3050	10x50	3000	ILF35-1W30-10x50H-160
42	3200	10x50	4000	ILF35-1W40-10x50H-160
42	3200	10x50	5000	ILF35-1W50-10x50H-160
60	4700	10	3000	ILF50-1W30-10H-160
60	4950	10	4000	ILF50-1W40-10H-160
60	4900	10	5000	ILF50-1W50-10H-160
60	4600	30	3000	ILF50-1W30-30H-160
60	4800	30	4000	ILF50-1W40-30H-160
60	4800	30	5000	ILF50-1W50-30H-160
60	4600	60	3000	ILF50-1W30-60H-160
60	4800	60	4000	ILF50-1W40-60H-160
60	4800	60	5000	ILF50-1W50-60H-160
60	4850	80	3000	ILF50-1W30-80H-160
60	5100	80	4000	ILF50-1W40-80H-160
60	5050	80	5000	ILF50-1W50-80H-160
60	3950	120	3000	ILF50-1W30-120H-160
60	4150	120	4000	ILF50-1W40-120H-160
60	4100	120	5000	ILF50-1W50-120H-160
60	4350	10x50	3000	ILF50-1W30-10x50H-160
60	4600	10x50	4000	ILF50-1W40-10x50H-160
60	4550	10x50	5000	ILF50-1W50-10x50H-160

Wattage*, W	Luminous flux, lm	Optics, degree	Code
356x82x82 mm, 2 kg RGB – DMX			
14	380	10	ILF9-1RGB-10CH-30
14	380	30	ILF9-1RGB-30CH-30
14	380	60	ILF9-1RGB-60CH-30
14	380	80	ILF9-1RGB-80CH-30
14	300	120	ILF9-1RGB-120CH-30
14	360	10x50	ILF9-1RGB-10x50CH-30

672x82x82 mm, 2,8 kg RGB – DMX				
28	760	10	ILF18-1RGB-10CH-60	
28	760	30	ILF18-1RGB-30CH-60	
28	760	60	ILF18-1RGB-60CH-60	
28	760	80	ILF18-1RGB-80CH-60	
28	610	120	ILF18-1RGB-120CH-60	
28	710	10x50	ILF18-1RGB-10x50CH-60	

987x82x82 mm, 3,8 kg RGB – DMX				
41	1150	10	ILF27-1RGB-10CH-100	
41	1150	30	ILF27-1RGB-30CH-100	
41	1150	60	ILF27-1RGB-60CH-100	
41	1150	80	ILF27-1RGB-80CH-100	
41	910	120	ILF27-1RGB-120CH-100	
41	1050	10x50	ILF27-1RGB-10x50CH-100	

1302x82x82 mm, 4,6 kg RGB – DMX				
55	1550	10	ILF36-1RGB-10CH-130	
55	1500	30	ILF36-1RGB-30CH-130	
55	1550	60	ILF36-1RGB-60CH-130	
55	1500	80	ILF36-1RGB-80CH-130	
55	1200	120	ILF36-1RGB-120CH-130	
55	1450	10x50	ILF36-1RGB-10x50CH-130	



Wattage*, W	Luminous flux, lm	Optics, degree	Color, K	Code
356x82x82 mm, 2 kg RGBW – DMX				
21	810	10	RGB W 3000	ILF12-1RGBW30-10CH-30
21	830	10	RGBW 4000	ILF12-1RGBW40-10CH-30
21	820	10	RGBW 5000	ILF12-1RGBW50-10CH-30
21	800	30	RGBW 3000	ILF12-1RGBW30-30CH-30
21	820	30	RGBW 4000	ILF12-1RGBW40-30CH-30
21	810	30	RGBW 5000	ILF12-1RGBW50-30CH-30
21	800	60	RGBW 3000	ILF12-1RGBW30-60CH-30
21	820	60	RGBW 4000	ILF12-1RGBW40-60CH-30
21	810	60	RGBW 5000	ILF12-1RGBW50-60CH-30
21	820	80	RGBW 3000	ILF12-1RGBW30-80CH-30
21	820	80	RGBW 4000	ILF12-1RGBW40-80CH-30
21	840	80	RGBW 5000	ILF12-1RGBW50-80CH-30
21	660	120	RGBW 3000	ILF12-1RGBW30-120CH-30
21	680	120	RGBW 4000	ILF12-1RGBW40-120CH-30
21	670	120	RGBW 5000	ILF12-1RGBW50-120CH-30
21	760	10x50	RGBW 3000	ILF12-1RGBW30-10x50CH-30
21	780	10x50	RGBW 4000	ILF12-1RGBW40-10x50CH-30
21	770	10x50	RGBW 5000	ILF12-1RGBW50-10x50CH-30



Residential complex ONLY