


TWIN

The new TWIN up-down lighting fixture, featuring the sleek and distinctive INTILED design, combines elegance with functionality. Its meticulously engineered mounting system ensures seamless integration with the façade, offering invisible wiring connections and straightforward installation.



Application

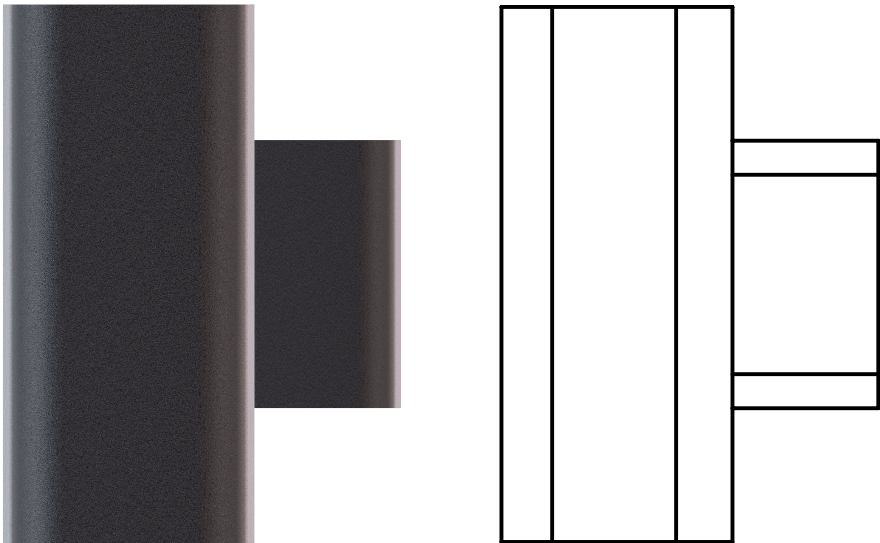

accent

TWIN



fullcolor
(multichip RGBW50)



2700 K



3000 K



4000 K



5000 K



Red



Green



Blue



Amber



15°



10α30°



15x50°



30°



65°



125°

CRI

≥80 (for white color)

Color Binning

2 MacAdam ellipses for white,
±3 nm for color LED

Power, W

28 (14+14)

Luminous flux, lm

2100 (1050+1050)

Voltage


230 V AC

IP66 IK08



Lifespan

not less than 50 000 hours



- 40°C + 55°C

Controls, protocols

monochrome: On/Off, PWM

multichannel: DALI, DMX-512, DMX-512 + RDM

Materials

housing, bracket – extruded aluminum

diffuser – silicate tempered glass

Standard RAL colors



1015



1001



8004



8017



9005



7016



9006



9003

Standard coating type

moire

Accessories

diffuser RV20.4

supporting profile cable channel

profile-cover cable channel

Customization

voltage 12, 24, 48 V DC

cable length up to 5m

connectors IP68

light distribution curve, light color, wattage

and luminous flux can be customized

for a specific project

Available custom versions



100%





Technologies



weight, kg

3

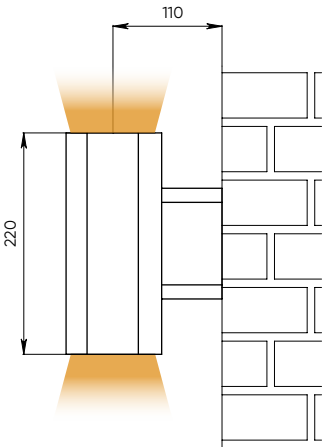

TWIN

