



TWIN

INTILED

about the family

INTILED
TWIN


The new TWIN up-down lighting fixture, featuring the sleek and distinctive INTILED design, combines elegance with functionality. Its meticulously engineered mounting system ensures seamless integration with the façade, offering invisible wiring connections and straightforward installation.




application

INTILED
TWIN

15x50°, 35x105°

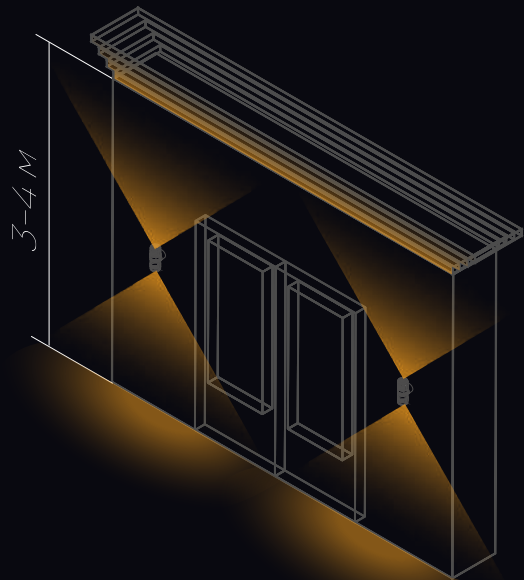

10x30°, 85°

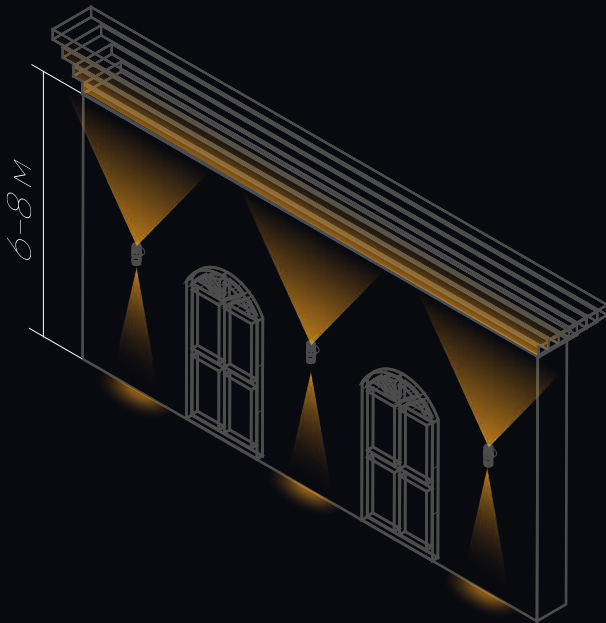


10°



10°, 30°



60°, 85°

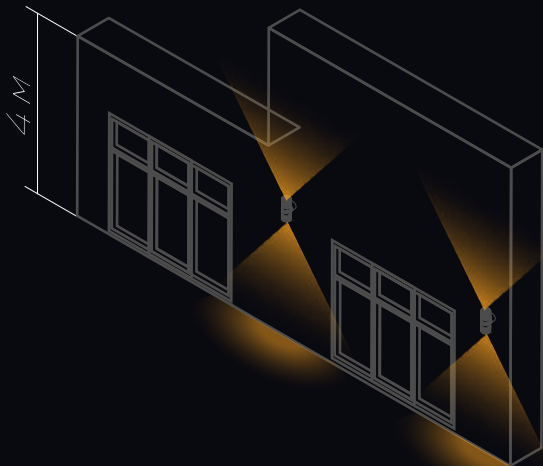

application

INTILED
TWIN



specific features

I N T I L E D
TWIN

Invisible wiring connection
and easy installation of the luminaire


Multiple secondary optics
options, including COB

Sleek shape and universal style
of the luminaire fits any facade




specific features: BUG rating

INTILED
TWIN

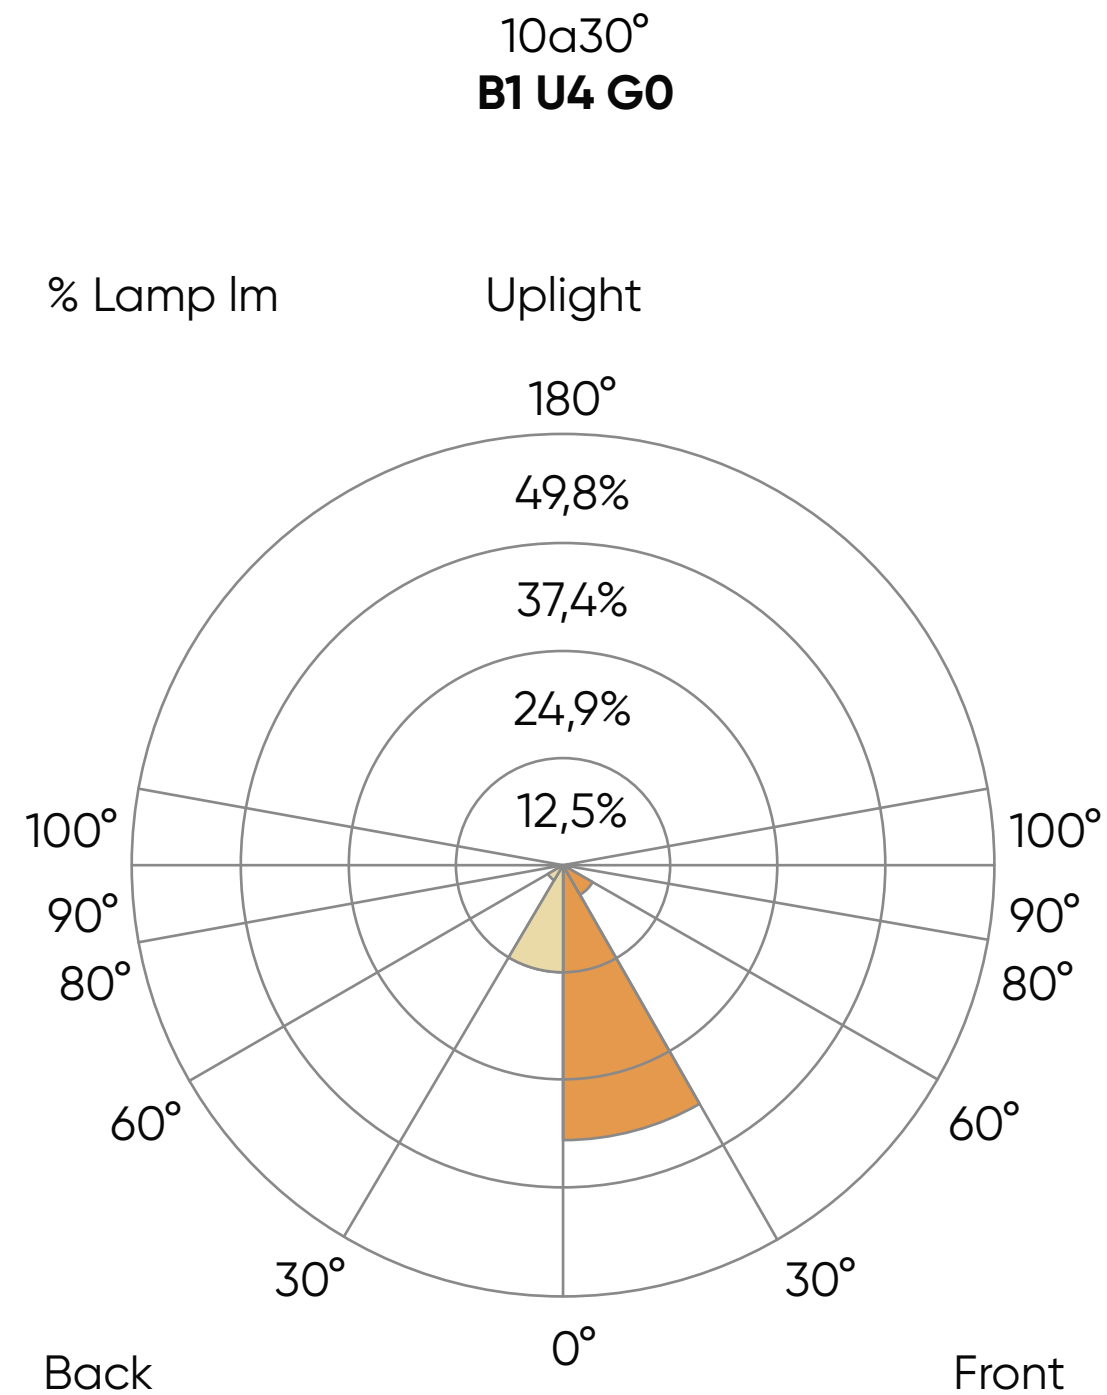

specific features: compatibility with KUB series

INTILED
TWIN

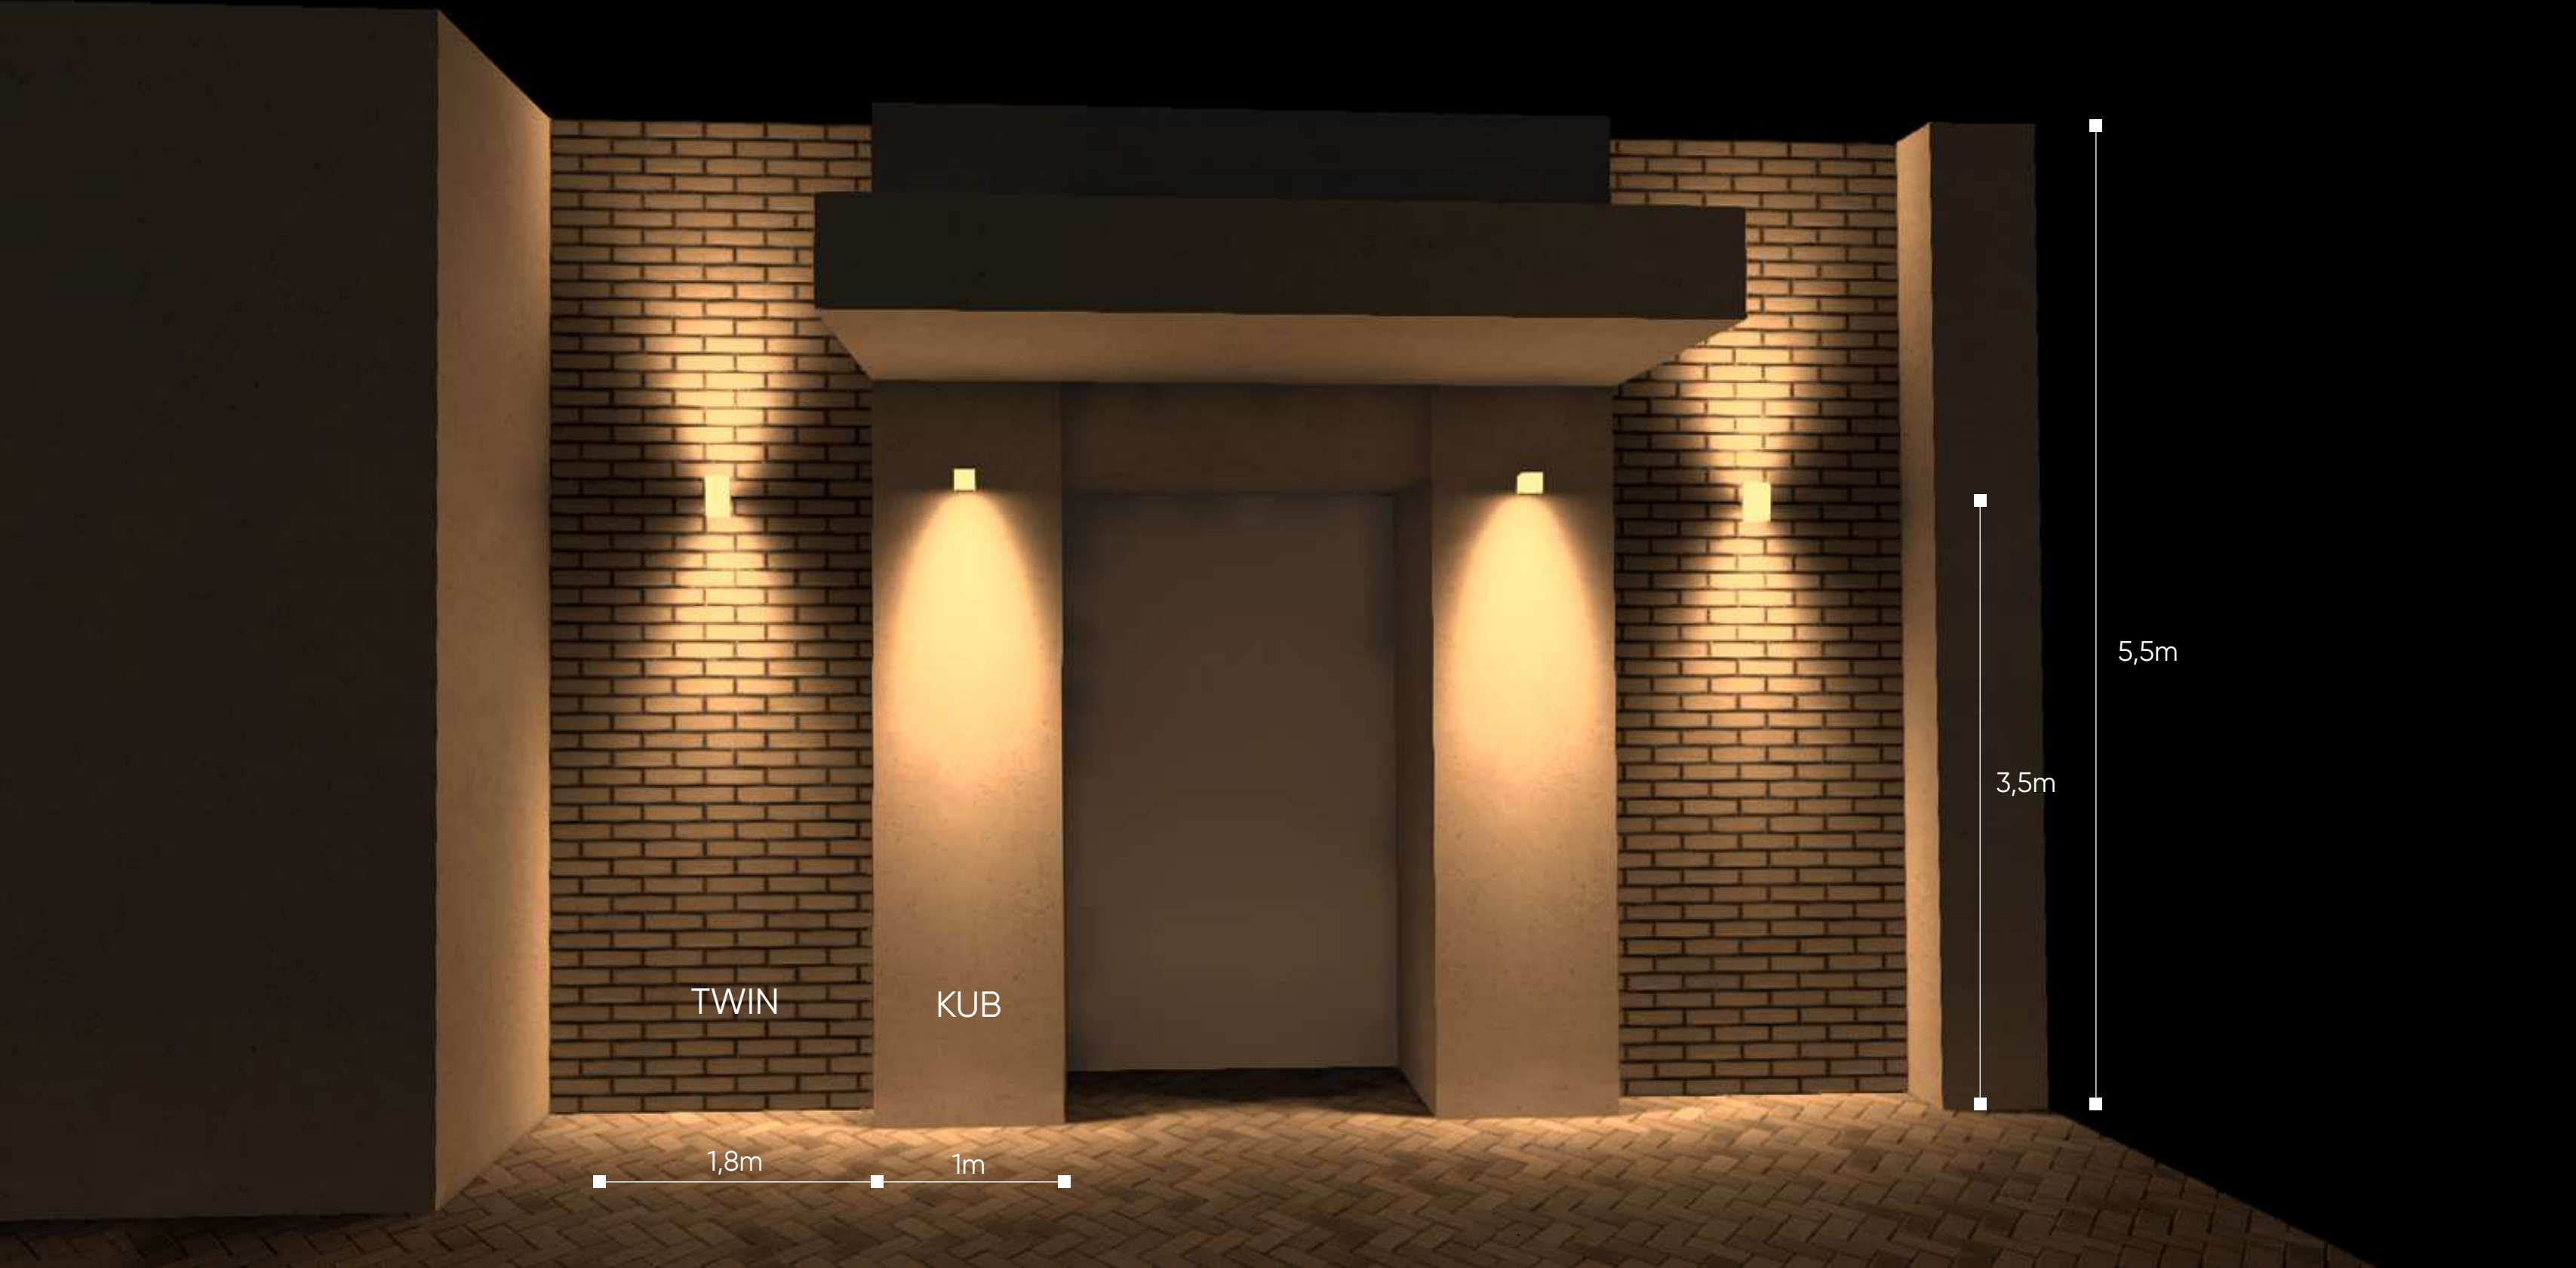

TWIN

KUB

1,8m

1m

3,5m

5,5m

characteristics



fullcolor
(multichip RGBW50)



2700K



3000K



4000K



5000K



Red



Green



Blue



Amber



15°



10x30°



15x50°



30°



65°



125°


CRI
≥80 (for white color)

Color binning
2 MacAdam ellipses for white,
±3 nm for color LED

Voltage
230 V AC, 24 V DC

IP66 IK08 

Lifespan
not less than 50 000 hours


- 40°C + 55°C

Controls, protocols
monochrome: On/Off, DALI
multichannel: DMX-512 + RDM

Materials
housing, bracket – extruded aluminum
diffuser – silicate tempered glass

Standard RAL colors



1015



1001



8004



8017



9005



7016



9006



9003

Standard coating type
moire

Customization
voltage 12, 24, 48 V DC
cable length up to 5m
connectors IP68
light distribution curve, light color,
wattage and luminous flux can be
customized for a specific project

Available custom versions









100%

Technologies


INTILED
TWIN

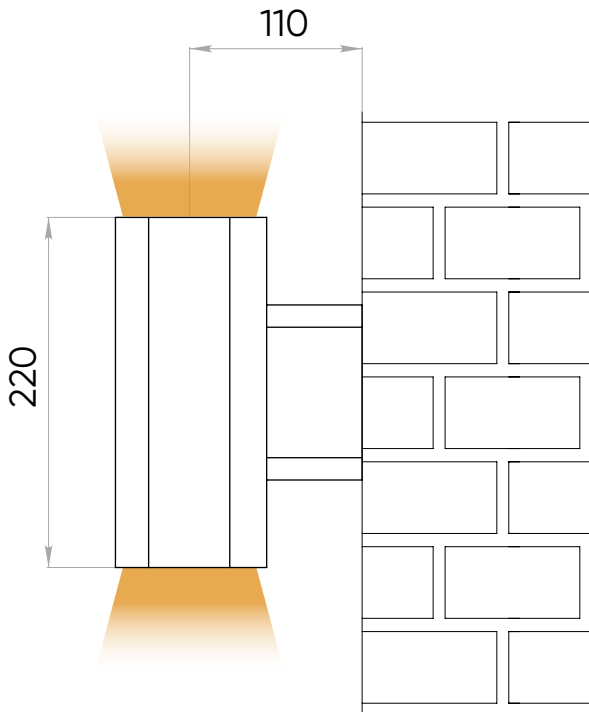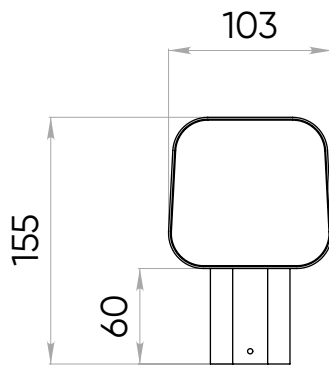


weight, kg
3


connection

I N T I L E D
TWIN


On/Off

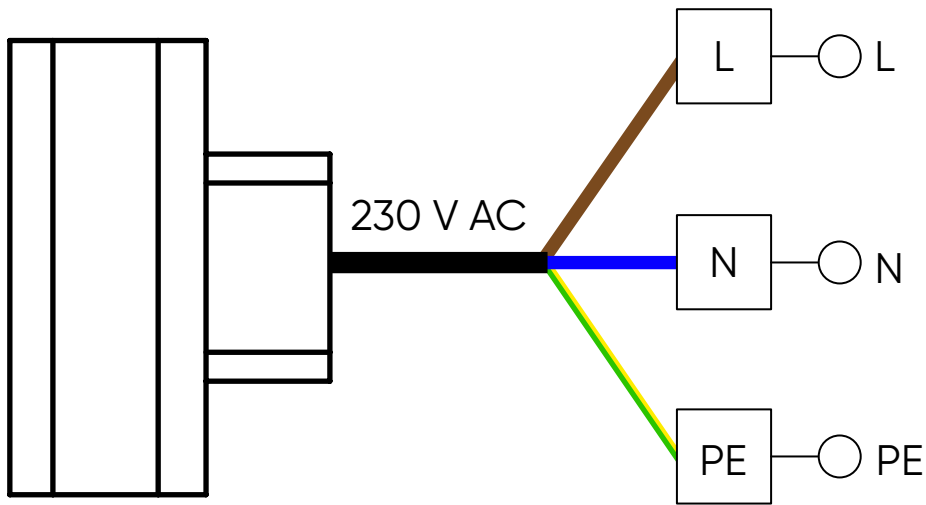

DALI

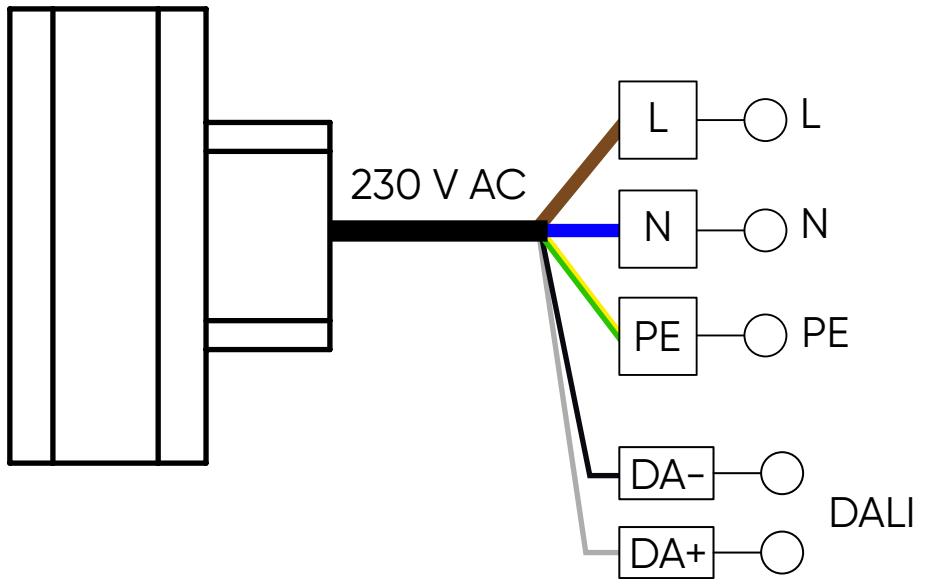

DMX-512+RDM

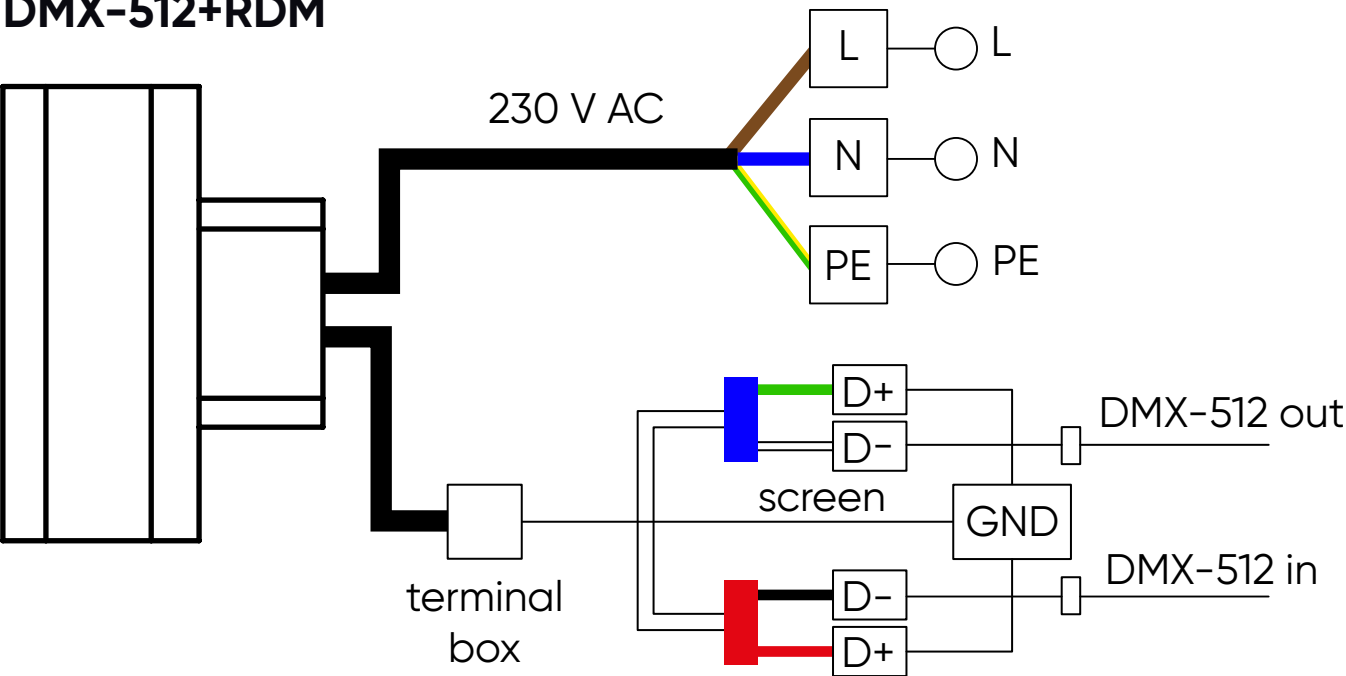

mounting


INTILED
TWIN

Step 1

Mark the holes for mounting the bracket on the wall.
Shorten the cable coming out of the wall to fit the luminaire leg along with the wire connectors.


Step 2

Remove the two M4 DIN913 screws
to detach the bracket from the luminaire.

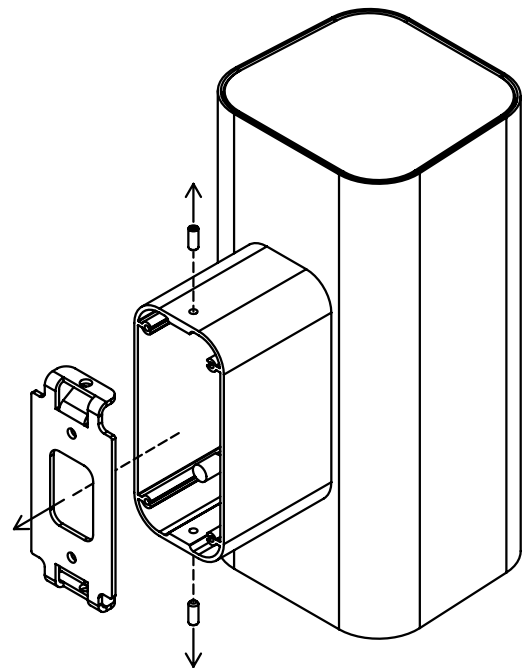


Step 3

Install the bracket on the wall.

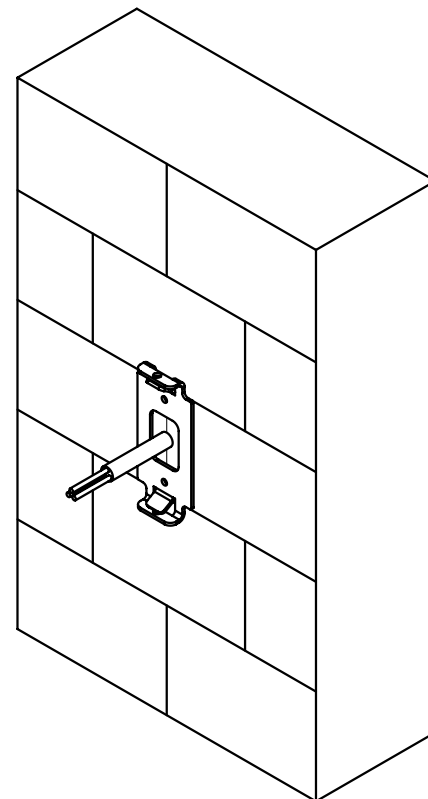

Step 4

Position the luminaire onto the bracket,
secure with two M4 DIN913 screws.

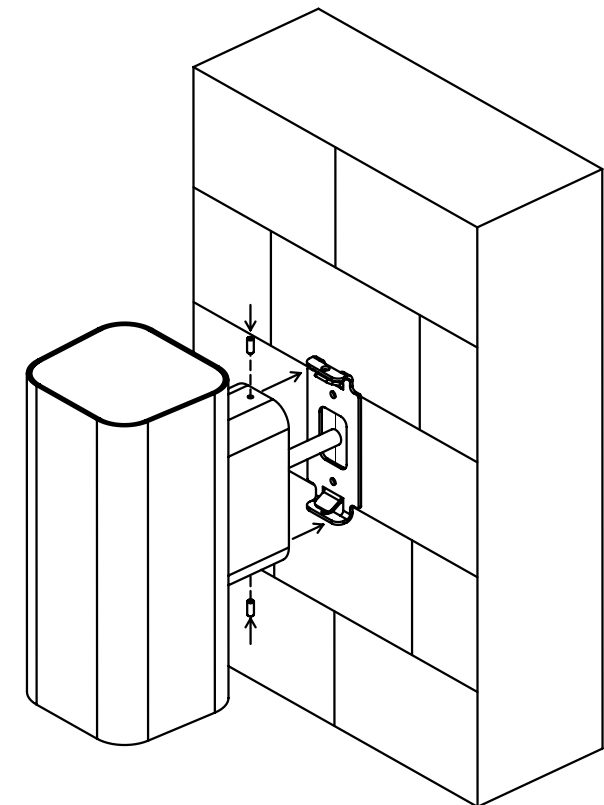

INTILED

Light. Done right.